

# SMARTCASE™ S730

## Chassis Kit Solution



Mini-ITX Motherboard  
D3713-V/R, D3723-R, K3931-N


FOR

### Industrial chassis for enhanced operating temperature range


- Compact Design (250 x 52 x 191 mm)
- Dual Front USB 3.2 Gen1 Connectors
- Low Profile Extension Slot
- Option for Internal 65W PSU Module
- Horizontal and Vertical Stand plus Wall Mount Bracket

<b>CHASSIS DATA</b>	<b>DIMENSIONS COLOUR WEIGHT</b>	250 x 52 x 191 mm (W x H x D) black ~ 1 kg
<b>SUPPORTED MOTHERBOARDS</b>		D3713-R D3713-V D3723-R K3931-N
<b>ENVIRONMENTAL CONDITIONS</b>	<b>OPERATING TEMPERATURE</b>	Passive heatsink (fanless; D3713-V/R or D3723-R): -10 °C ... +35 °C (max. 15 W TDP, vertical/horizontal position *) -10 °C ... +40 °C (max. 12 W TDP, vertical position only *)
	<b>HUMIDITY</b>	Passive heatsink (fanless; K3931-N): -10 °C ... +40 °C (max. 15 W TDP, horizontal position *) -10 °C ... +45 °C (max. 15 W TDP, vertical position *)  Active heatsink (with Fan): -10 °C ... +45 °C (max. 35 W TDP, vertical/horizontal position *) 5 % - 85 % relative humidity (non-condensing)
<b>CHASSIS FAN SPECIFICATION</b>	<b>MTBF OPERATING TEMPERATURE</b>	70.000 hours @ 40 °C -10 °C - 70 °C PWM (4 pin), 40 x 40 x 10 mm 900 - 5.000 rpm (nominal) Two ball bearing
<b>REQUIREMENTS FOR AC ADAPTER</b>	<b>DC OUTPUT DC OUTPUT PLUG</b>	8 V-34 V (5 A max./65 W max.) Ø 2.5 mm/5.5 mm  Important Note: Compliance with IEC 62368-1 according clause 6.2.2. to power source category PS2 ("Limited Power Source") required!
<b>APPROVALS &amp; CERTIFICATIONS</b>	<b>EMC SAFETY</b>	CE Class B, Industrial Immunity (EN 61000-6-2), FCC-B/ICES-003 verified Safety Testreport according IEC62368-1
<b>PACKAGE CONTENT</b>		Chassis bottom/top incl. front bezel; I/O with integrated EMI gasket Dual front USB 3.2 Gen1 connector HDD carrier incl. 4 pin PWM fan Riser card holder incl. power button/power LED and intrusion switch HDD SATA cable and power cable for one drive Wall mount metal brackets Motherboard mounting Screws Chassis desk stand (horizontal/vertical, removable)
<b>CHASSIS FEATURES</b>	<b>THEFT PROTECTION</b>  <b>MOUNTING OPTIONS</b>	Kensington lock support Mechanical lock for DC-In connector Intrusion Support WLAN antenna via (RP-) SMA connector PCIe riser (PCIe x4, low profile) Two rear COM ports (COM3, COM4) 2.5" Drive (HDD/SSD) Rear USB 3.2 Gen2 Type-C extension (K3931-N only)

\*) Chassis ambient temperatur

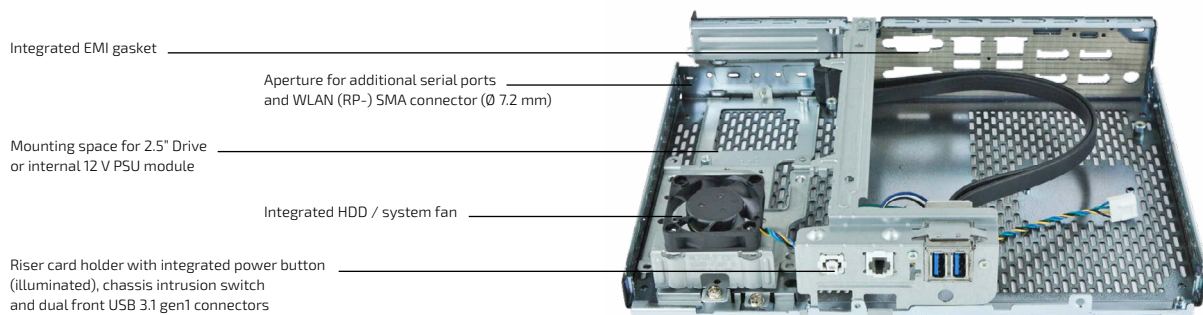

## Chassis prepared for optional features

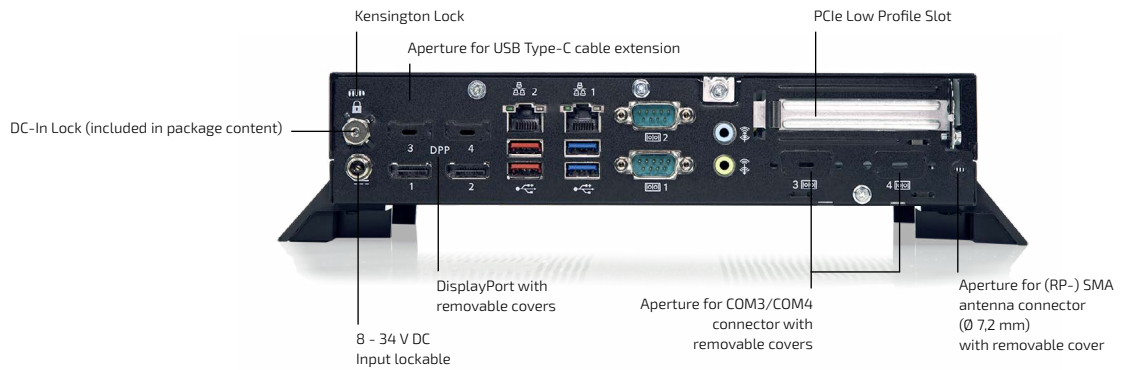

## Ordering Information

ARTICLE	PART NO.	DESCRIPTION
CHASSIS KIT SOLUTION	F5000-J012*	10 pcs

### Accessories

FANLESS HEATSINK KIT	S26361-F5000-C019	Passive Heatsink, max. 15 W TDP (for D3713-V/R or D3723-R only; backplate included)
SLIM ACTIVE HEATSINK KIT	S26361-F5000-C021	Active Heatsink, max. 35 W TDP (for D3713-V/R or D3723-R only; backplate included)
SLIM ACTIVE HEATSINK + BACKPLATE	F5000-C026	max. 15W TDP (for K3931-N only)
FANLESS HEATSINK + BACKPLATE	F5000-C025	max. 15W TDP (for K3931-N only)
RISERCARD	S26361-F5000-R006	D3318-A
INTERNAL PSU MODULE	S26361-F5000-P004	12 V Internal PSU
EXTERNAL AC ADAPTER 65W@19V	S26361-F5000-P006	AC Adapter, 19 V/3.42 A, 65 W
SERIAL PORT CABLE	S26361-F5000-K010	Length = 400 mm, fullsize slot bracket
MINI PCIe TO M.2 ADAPTER	S26361-F5000-M003	Adapter for Mini PCIe to M.2 Wi-Fi modules (for D3713-V/R or D3723-R only)
TPM MODULE	S26361-F5000-R012	Infineon SLB9670, TPM V2.0 (for D3713-V/R or D3723-R only; TCG compliant)
REAR USB TYPE-C EXTENSION	F5000-K013	USB 3.2 Gen2 adapter cable for internal USB Key-A socket (for K3931-N only)

\* SMARTCASE S730 (F5000-J012) replaces SMARTCASE S711 (F5000-J008), and provides additional support for K3931-N (AlderLake-N series)

## Global Headquarters

### Kontron Europe GmbH

Gutenbergstraße 2  
85737 Ismaning, Germany  
Tel.: + 49 821 4086-0  
info@kontron.com

www.kontron.com

